

QUANTUM



THE CENTRALIZED CARD PRODUCTION SYSTEM

The Quantum printer is the solution for printing and encoding cards in large volumes. It personalizes the cards front and back, in color or monochrome, with a record printing speed.

Quantum combines the feel of a desktop printer with the power of an industrial printer for centralized production of plastic cards in large quantities.

INCREASED PRODUCTIVITY


- With a feed tray and stacker capacity of 500 cards each, the Quantum printer can deliver more than 1000 cards per hour in monochrome and 150 cards in color.
- Thanks to reversible encoding module (magnetic stripes, contact smart cards and contactless cards) independent from the print module, the cards are encoded and printed in a single pass.

ENHANCED VERSATILITY

- Quantum has been designed to be personalized on-site, directly by the user. For instance, you can add or reverse an encoder very easily and quickly.
- The card production system adapts to your evolutive needs: single or dual sided printing, diverse encoding modules, printing options and plastic card types available.

ECONOMIC SOLUTION

- Quantum can handle large volumes of cards with very high print quality, providing a very economical alternative to industrial card printers.
- You can control your costs and produce your cards yourself instead of having to go to an outside provider.

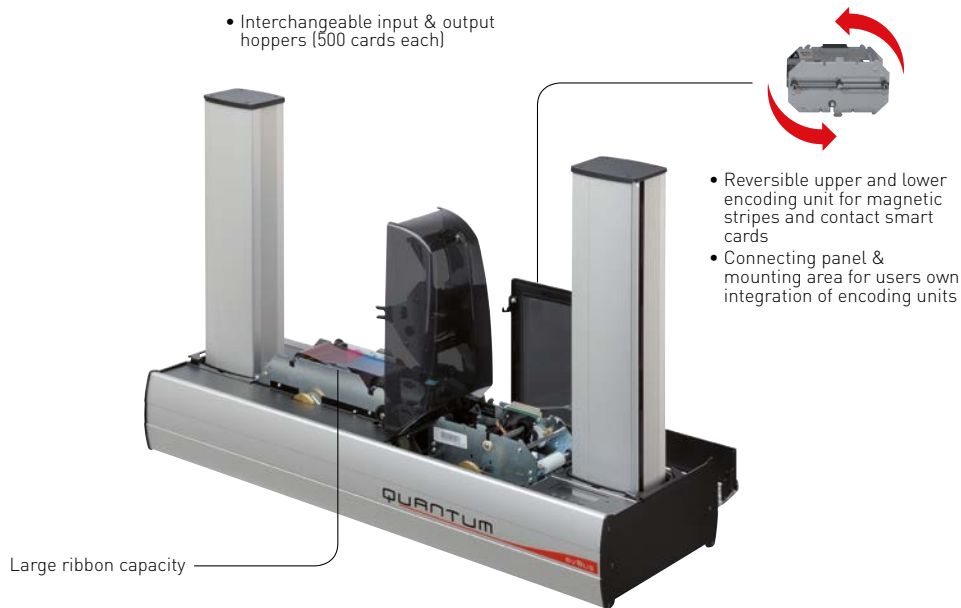

MAIN FEATURES

GENERAL FEATURES

- 2 configurations:
 - Standard version without locking mechanism
 - Version with centralized locking system
- Direct-to-card dye-sublimation/Resin thermal transfer
- Single-sided and dual-sided printing module
- Edge-to-edge printing
- 300 dpi print head (11.8 dots/mm)
- 16 MB memory (RAM) allowing two card storages (front & back)
- Interchangeable input and output hoppers, capacity of 500 cards each (0.76 mm - 30 mil)
- Aluminum body, black plastic covers

PRINTING PERFORMANCES

- Single side:
 - Color (YMCKO): 150 cards/hour
 - Monochrome: 1000 cards/hour
- Dual side:
 - Color (YMCKO-K): 115 cards/hour
 - Monochrome: 320 cards/hour

INTERFACES

- USB (1.0, 1.1, 2.0, 3.0), cable supplied
- Ethernet TCP-IP 10BaseT, 100BaseT (Traffic Led)

SAFETY

- Centralized locking system (optional) to secure access to the whole system (incl. cards and ribbon)

DISPLAY

- 2-line LCD display
- Status LED for printer and encoding unit monitoring

CARD MANAGEMENT AND SPECIFICATIONS

- Detachable and interchangeable card input feeder and output stacker with 500 cards capacity (0.76 mm - 30 mil)
- Reject hopper for defective cards with a capacity of 20 cards (0.76mm - 30mil)
- Detachable hopper (long or short doors) with a capacity of 500 cards (0.76 mm - 30 mil) as an option
- Card types: PVC cards, composite PVC cards, PET cards, ABS cards¹, special varnished cards¹
- Card format: ISO CR80 - ISO 7810 (53.98 mm x 85.60 mm)
- Thickness: 0.76mm to 1mm (30 to 40 mil)

ADDITIONAL PACK OFFER

- Quantum Production Pack: 1 detachable card hopper with short door, 2 cleaning rollers, 1 cleaning kit
- Quantum Backup Pack: 1 print head, 1 reversible encoding module, 1 detachable card hopper with short door

ADDITIONAL ENCODING MODULES

- Reversible upper and lower encoding unit for magnetic stripes and contact smart cards (patented)
- HiCo/LoCo magnetic stripe encoder ISO 7811 or JIS2
- Smart contact station - ISO 7816-2
- Connecting panel and mounting area for users own integration of encoding units
- Encoding options:
 - Smart encoding unit - PC/SC, EMV 2000-1
 - Contactless encoding unit - ISO14443A & B, MIFARE, DESFire, HID iCLASS
 - Other types upon request

EVOLIS HIGH TRUST® RIBBONS

To maximize the quality and durability of printed cards, the lifespan of the print head and the overall printer reliability, use Evolis High Trust® ribbons.

- Ribbon saver for monochrome printing
- List of ribbons available on www.evolis.com

SOFTWARE

- Delivered with cardPresso XXS for designing and editing badges:
 - Internal database (unlimited records)
 - Windows® (from XP onwards) and Mac OS X
- Windows® (32/64 bits): XP SP3, Vista, W7, W8, W10
- Mac OS X v10.4 and higher (upon request)
- Linux (upon request)

CERTIFICATIONS AND STATEMENT OF COMPLIANCE

- RoHS
- CE, FCC, VCCI, ICES
- EAC²

SIZE AND WEIGHT

- Size (H x W x D):
 - Without hoppers: 215 x 300 x 850 mm (8.46" x 11.81" x 33.46")
 - With hoppers: 567 x 300 x 850 mm (22.32" x 11.81" x 33.46")
- Weight: 21.7 kg / 47.8 lbs (18.3 kg / 40.3 lbs without hoppers)

WARRANTY³

- 1-year warranty (excluding print head)
- Warranty extension available as an option

¹ Under specific conditions / ² Depending on the printer model
³ Warranty subject to observance of specific conditions and use of Evolis High Trust® ribbons.



ISO 9001: 2008

